Lunar Dust Blower Semi-Finalist List for NASA HUNCH Design and Prototyping 2021

Congratulations for being chosen as a Semi-Finalist for NASA HUNCH Design and Prototype 2021. Your design was chosen as a semi-finalist because you have a prototype that shows some or all of your idea, interesting/original ideas in your design, you did some valuable testing, and/or had some CAD designs that conveyed significant contributions. Despite the difficulties and not as many schools participating this year, I believe that HUNCH has received as good of quality of projects as ever. You should be very proud of your prototypes and ideas especially because of the difficulties surrounding this school year. Some schools have been out of class all year and others have been in class all year but students were being pulled out of class for weeks at a time. Some students were only able to work and build from home. One school was only able to work together on their project for 3 weeks before their CDR. Everyone should be commended on your resilience to finish your project and the great ideas and work you have put together in front of your own eyes. Prototyping and testing are the first steps in any engineering project and all of you have learned the value of it.

It is from the Semi-Finalist list that we will narrow down our choice for Finalists. We at HUNCH are very proud of how difficult you as students and teams have made it to choose which designs should go forward. **Congratulations!!!**

This list may be updated in the next day or two if we find we are missing a few team's brochures.

We expect to have the list for the Final Design Review in the next day or so as well.

Critical Design Review – NASA HUNCH

Project Title: Lunar Dust Blower

School Name: Space Coast Jr/Sr High School

Teacher: Mr. Luis Reyes

Team Member Names: Dalton Sams, Aiden Arrington, Arrianna Brown, and Cyrus Coulter

Description of your Prototype / Data collected

The lunar dust blower prototype we have created is based off of a Kobalt electric snow blower. Unfortunately, we could not purchase this snow blower but our design is solely based on it. We have taken the design of the snow blower and made some modifications to make it suitable for the environment and conditions on the moon. We created a 3d prototype with a scoop-like blade that will pick up the dust as it moves through a metal grate on the front of the dust blower. The dust will then be thrown to the location it needs to be. Since we cannot make the prototype electric, we have put the blade and wheels on the same axel to allow the dust to be picked up as it's rolled. The prototype we've made also has an adjustable handle to make the product more efficient in terms of storage and use for people of different heights. Lastly, the prototype will not be made of the material that would be used but will be silver to represent this quality. The materials, along with other parts we could not include, will be discussed as we are presenting the prototype.

Most of the structure of the dust blower is quite similar to that of the snow blower. Most changes made were made to withstand the temperature and meet the constraints needed for the problem. We didn't really make any changes in terms of the microgravity on the moon because there are no loose components inside of the snow blower. With this structural advantage, microgravity should only truly be a concern when the dust is thrown onto the habitats. Although the structure of the two products is similar, there have been changes made to the materials as well as additional features to meet both the criteria and constraints of the problem. Most of the criteria can't be shown as they would really be but will be manually shown or discussed. An example of this is how the machine would actually run. We unfortunately cannot make the prototype electric but can manually show how the interior parts would function in a final product. To meet the specified constraints, we have added things such as a wire grate to the opening of the dust blower and a heat sink to the motor to ensure that everything works as it needs to be.


As we have been completing our prototype, we have been documenting our progress through pictures and descriptions. We have labels on our prototype that show what kinds of materials were used in the making of it. These will allow for the prototype to be recreated if it is needed. All of our drawings show what each part will be and what is will do for our problem. The descriptions that go along with it further explain the parts and materials. As for testing,

we are testing the functionality of the blade and the rest of the prototype separately. Due to the proportions of the different parts of the prototype, it would be very difficult to test them together and have an effective result. The blade alone will show the success of the design even though it is not actually attached to the rest of the prototype. This information will be fully documented to show the results of the testing.

<u>Photos of your prototype with labels (If no prototype – summary of testing data Brief</u> descriptions / data collected)





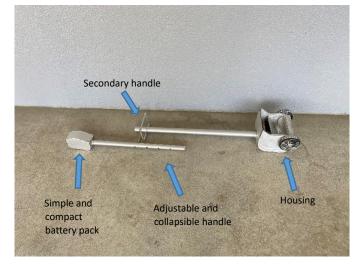





NASA HUNCH Critical Design Review

Project Title: Lunar Dust Blower

School Name: Space Coast Jr/Sr High School

Teacher: Mr. Luis Reyes

Team Member Names: Nicolas Puzino, Dawson New, Dylan McCullough, and Jax

Martin

Description of your Prototype / Data collected

The NASA hunch design my team chose is the Lunar Dust Blower. The issue is that astronauts need to find a way to move lunar soil to the top of lunar habitats. We must modify a snow blower model to operate on the moon. My team took the challenge and created a design that considers and addresses all criteria and constraints. It also considers materials and whether parts should be bought or produced. The careful planning of our design makes it a great choice for NASA hunch.

The project satisfies all of the criteria provided. It has an electric and a variable speed motor, it only grinds rocks below an inch, it is easy to control with appropriate wheels, and it has a directional dust shooter. The project circumvents the constraints of easily overheating on the moon's surface by using heat sinks to lower temperatures. It uses a compact design and an adjustable handle to not be too heavy and for easy transportation. Finally, it filters out large rocks to not strain or break the machine, while letting smaller patches of soil through.

The project has a prototype and a 3D rendering. The render was created using Solidworks. In the actual blower, it is engine powered, which moves it through the soil and ramps it into the front. Our project is very similar to a snow blower after this. It picks up soil and launches it through a wire mesh. If it is too big to fit through, it falls down where it exits through a hole. If it goes through, it is sent through an auger and into a direction changing chute.

The testing data we provided shows us perfecting our prototype through trials. The newly installed ramp successfully picked up dirt into the ramp. The auger could successfully throw dirt into the back of the blower. The wheels functioned perfectly and could traverse terrain well. The chute spun 360° as intended. We liked the adjustable handle and the ramp design after our testing. Our tests overall showed successes in our prototype and allowed us to see the benefits of our design.

The documentation (Google Slides) lists the materials used to create the blower and those used to make the prototype. It also tells which materials can be bought instead of made. More parts were chosen to be bought instead of made in order to make the replication and production easier. Clear instructions on the functionality of the parts are also provided. Each part's purpose is known and explained in the drawing. The prototype's materials are shown and a step by step process is listed on how we reached our final product.


The project does take microgravity and the environment on the moon into consideration. The wheels are specially designed moon wheels by another team, used to gain a better grip on the moon's surface. The lowered gravity also lets the blower utilize a ramp to throw soil either through a mesh or out of the side. Past the mesh is an auger that throws soil through the chute at the top, again utilizing

lowered gravity to throw further. The copper heat sinks exist instead of liquid cooling because liquid cooling does not function properly on the moon due to lowered gravity. The front lip brushes against the soil as a way to pick up dust without it being manual labor.

The blower is a modified snow blower, meaning many parts can be taken off of a regular snow blower. The auger is standard and can be bought off the shelf. The handle is a simple adjustable commercial handle. The chute is also a standard directional snowblower chute. Heat sinks can also be bought commercially, meaning 4 total parts of the dust blower can be bought instead of manufactured. Only the body and wheels must be manufactured. This means the production can be streamlined and quicken fairly easily, leaving very little for direct manual labor.

In conclusion, our blower utilizes a variety of techniques to overcome challenges. Design aspects address criterion and make usage easier. Material choice was also deliberate in order to get the best results. The conditions of the moon were worked with to complete a working design. Our prototype also accurately represented our design and had every major aspect of it.

Photos:










Group Members Ethan Le 0001080987@ccisd.net Chancellor Johncock 100000748@ccisd.net Aaron Edwards 0001085524@ccisd.net

Moon Dust BLOWER



Clear Creek High School 2305 E Main St, League City, Tx. 77573 For: Robin Merritt, RMERRITT1@ccisd.net

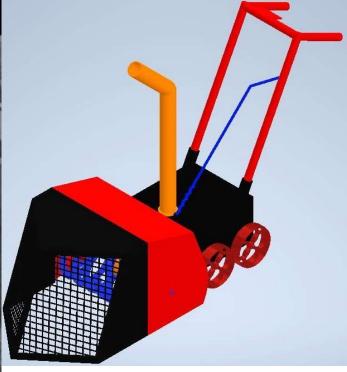

OUR DESIGN

Adjustable chute with an 180degree range to allow the astronauts to shoot the dust in the desired location

Trigger like handles which make the snow blower easy to use for the astronauts in their bulky suits


Heat sink that is connected to chute which uses the cool moon dirt that passes through the chute to cool down the heat sink

Cow catcher similar to one on a train used to filter out large rocks that could damage the habitat

Problem Statement

In future mission, on Luna, the astronauts will set up habitats for themselves. These habitats need layers of moon dust to block out radiation. Our team needs to develop a way to transfer this dust. This device will need to be able to withstand the environment of Luna and it must be electric. Our focus will be more on the modification of an existing design than the creation of a completely new one.



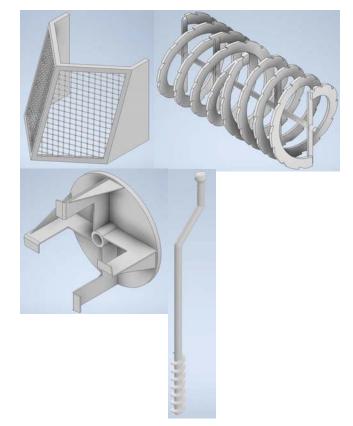



JUSTIFICATION

THIS BLOWER IS NEEDED FOR COVERING THE LUNAR HABITATS WITH MOON DUST. THEY NEED TO BE COVERED BECAUSE THE HABITATS ALONE ARE NOT CAPABLE OF BLOCKING OUT THE REQUIRED AMOUNT OF RADIATION AND THE DUST CAN MAKE UP FOR THAT SHORTCOMING.

CALCULATIONS AND EXPLANATIONS

In order to throw material, the best possible range and height, the chute will have to be at a 45-degree angle, and it will have to have a second stage impeller that goes roughly 1000 rpm. the first stage's auger will have to go roughly 100 rpm so that a good amount of material reaches the impeller. this dust blower will have to be used for a long time and so steps must be taken to ensure that the least amount of damage occurs. besides using tougher materials, a cow catcher made from grating with gaps no larger than .25in. would prevent any large debris from damaging the blower and the habitat. the blower's chute will also have to be capable of rotating at least 180-degrees to facilitate easier use.

ENVIRONMENT

Luna's Environment –

The surface of Luna is covered in a very fine dust that acts like sand grain-sized shards of glass against objects and because of this, metal is our only option. The temperature extremes are also an issue; -250° to 250° Fahrenheit.

Environment Counters –

A heatshield and heatsink are needed to counter the extreme temperatures on Luna. The heatshield will be positioned to also act as the heatsink. This piece will be like a box over the motor and it will have enough contact with it to leech of heat. The chute of the blower will be incorporated into the heatsink to add surface area. This allows for collected heat to be transferred to the lunar dust travelling through the chute. The electrostatic charge generated by the lunar dust will cause the dust to stick to the blower and this will cause malfunctions and/or reduced efficiency. Nasa is developing an anti-static coating that could prove useful in countering this problem.



Mobilization

For this dust blower to be effective, it must be able to move easily and reliably. It doesn't make much sense to send a whole other motorized vehicle to the moon, as it would add another vehicle to maintain, as well as adding millions of dollars to send a heavy motor. We will instead have the dust blower towed by the rover. Skis will be used instead of tires to minimize moving parts.









2020-2021


Nasa Hunch "Dust Blower"

Billings Career Center

Tristan Peter and Taylen Hawkins Mr Anderson

Moving Dust

One rather large challenge we came across was how to move the dust and how to sort out rocks over 1". We added a wire mesh over the front that doesn't allow rocks over \(\frac{4}{2} \)" through. However long term use of this will cause damage and will eventually need to be replaced. I designed a grinder inspired by a pencil sharpener that will break up any rocks that are over 1" in diameter. Unfortunately, we were not able to get the parts necessary for this piece, so we still have the grate. Ideally, we would have this grinder installed and the prototype would be a 2-stage snow blower. We also have a bucket to store a small amount of dust.



Tristan Peter 2021

Final Prototype



CAD Prototype









Lunar Dust Blower

School: Billings Career Center

Teacher: Eric Anderson

Team Members: Nolan Leonard and Jordan Dervishian




Description: Our lunar dust blower features a wire mesh on the intake chute, a hanging bag on the side for dust storage, and a directional chute that guides the dust into the bag. The mesh filters out rocks and only allows dust in while being removable. The bag can fold up and is also removable for SEV pickup. The chute guides dust into the bag without clogging or escaped dust. Our design allows distant dust to be taken back to the habitats as well as nearby.








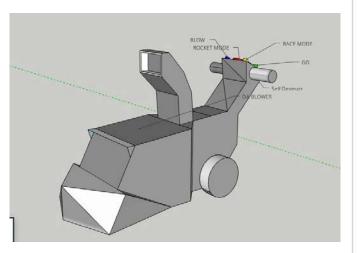

Our blower is able to scoop the dust from the ground with the rubber auger and will not throw rocks bigger than 15 millimeters because of the grated plate that is on the back of the auger housing, which is completely sealed. Which that then leads to another grate that is 10 millimeters which will be able to take out any rocks that somehow made it through the first grated plate. The rubber auger is able to move up and down depending on the ground level so you don't pick up any extra rocks. The plow in the front is a great addition as well to push away any large rocks that may get in your way.

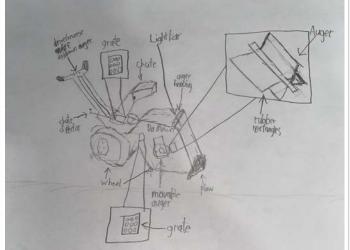

This is our rough design for the beginning of our snowblower/ dust blower


The idea of a regular snow blower is what we are looking at but with a few alterations. The will be an extension to the top of the blower that goes all the way around the rubber auger that will be able to move up and down depending on the terrain the astronauts are in. The completely sealed inside will have a vacuum that will suck all the dust into grated chute that will keep out all the rocks and pebbles that will harm the lifepods and blow out the dust with ease.

Dust Blower

By:Branodn Ringuette and Kaleb Baron/ SJVTC Teacher: Mitchell Daigle



• We have to figure out how to move the dust efficiently without getting space dust all over the astronauts and the Space Pods.

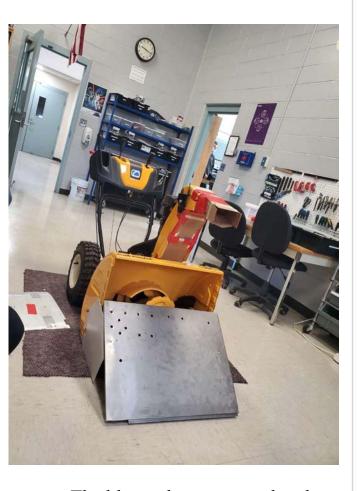

The blower has a manual and extended chute that helps save the battery and is easy to move back and forth to blow the dust where every you would like. We have changeable batteries to be able to get more done during the day so you can charge a battery while using a battery.

Parts List for our Blower

- Snowblower
- Rubber liner
- Thick Rubber Pieces
- Metal Auger Rod
- Sheets of metal for auger housing and plow
- Small pair of skis
- Small LED light bar
- Screws and bolts
- Aluminum shoot
- Two metal skies
- Tires or tracks



Criteria and Restraints


- 15mm diameter holes for the grate
- Plow in the front of auger housing to move large rocks out of the way
- Seal and vacuum in the auger housing to chute to move the dust out
- Large rubber rectangles on the auger to scoop dust
- Changeable and rechargeable batteries so that you can charge a battery while using another one using solar powered energy to charge.
- The Chute has to be directed manually to save battery

Lunar Soil Displacement Device

(Lunar Dust Blower)

Conroe High School Mr.Canestorp Cesar Arrona



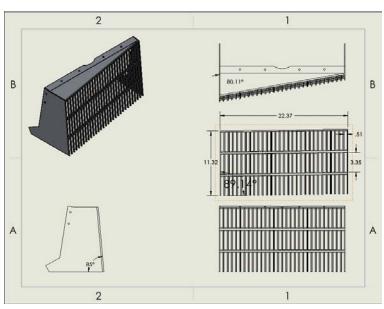

The grill at front is designed to stop rocks from getting in and to slowly push the rock to the side.

For heat dissipation a radiator is fitted in the pipe in which soil exits from. When the soil touches the radiator it takes the some heat away.





Team Members:

Dan Krauss Sydney Mandel Ava Paulson Fred Bauer (Teacher)

LUNAR DUSTBLOWER



Includes the shaft which is able to rotate to allow for directionality of filling the baffle


Pictured: the chicken wire used to replicate a sifter. Will not allow for pieces bigger than an





Sifter and directionality





Parts



NASA HUNCH RADIATION PROTECTION

SANDRAG STRUCTURE








MAIN BENEFITS

The benefits of the sandbag structure includes its; safe handling of lunar regolith, size efficient bags for storage and transportation, maximized soil protection, security of regolith, sturdiness of structure both externally and internally, forming and simple geometry, and exercise opportunities for the astronauts.

BAG DESIGN

The size of the individual bags are dimensioned such that it feels like lifting 20 pounds on the moon. Since lunar gravity is 1/6 of the gravity on earth, the bags are dimensioned to hold 120lbs of lunar soil on the moon. With a desired length of 30 in for easy handling, we calculated that the radius of the end of the bag would have to be 4.85", or a 9.7" circumference.




Material research was conducted with the priority of being able to block gamma radiation.

Two of the options narrowed down is kevlar, and Nextel.

Kevlar is our prioritized option because it is a strong synthetic material, heat-resistant, and also can **block radiation** using a certain amount.

Nextel is a ceramic fabric that is stronger than aluminum, fire resistant and is able to withstand meteoroids. Nextel is used on NASA's Space Shuttles and keeps satellites from getting demolished.

BAG MATERIAL





SOURCE: NASA

FILLER STATION


The filler station is designed for the restricted mobility of the astronauts. gray component acts as the direct holder for the bag, (similar to lining а trashcan) allowing astronauts to do the work without bend to having uncomfortable/imposs ible angles.


Closing the bag should be easy and effortless for the astronauts because of the restricted movement of their gloves. Having a drawstring at the end of the bags is a simple and affective way for them to achieve this.

CLOSING THE BAG



Attaching the bags to each other can be done through layering hooks/barbed wire in between each layer of the bags. The hooks along the wire can be small enough to catch the bag, but not big enough to tear them. Like a fishing hook.

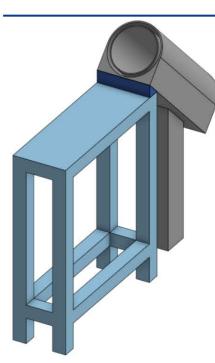

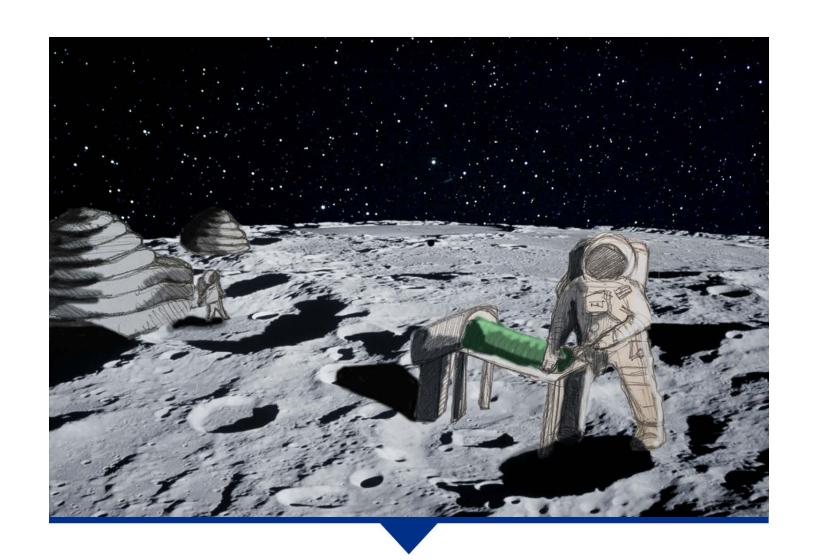


RADbags



Pictured from left to right: Austin Harris, Stella Vickland-Davis, Carlos Nava-Gonzalez

Lunar Dust Blower

Objective: Make a device that can get lunar dust on inflatable habitats to help protect them from harmful rays.




Group Photo Members: Aidan Manske, Dylan Politoski, and Kyler Newkirk

Teacher: Mr. Manske





Battery Pack: It will have a battery pack that would allow the dust blower to operate without having to be wired to a separate source.



Airless Wheels:

These wheels are airless so that they can be used on the moon since the moon doesn't have an atmosphere. They are also wider so that it's harder for them to sink into the ground.





Suspension:

The suspension is a piece of sheet metal that is in a circle that allows it to be squished down a little. On the bottom of the metal is a rod with both wheels attached to it. This will help it go over rough surfaces while being used on the moon. The suspension doesn't hold the main part off the ground, so it is still usable.



LUNAR DUST BLOWER

James Parker, Jeremiah Johnson, Brandon Williams

We attend Manvel High School where we are instructed by Mr. Smith

Our project is the lunar dust blower, its goal is for it to blow the lunar dust of of the moon's surface on to the top of the lunar habitats.



OUR PLAN BREAKDOWN

Component 1:

This is where we identified our problem and our 5 attack paths. We documented the patents and researched current and past solutions. And lastly we went over the design requirements specs, and customer requirements.


Component 2:

We did sketches of the lunar dust blower to help explain how the lunar dust blower will work and what it should look like. This includes isometric views and front, top and side views of our future product.

KNOWLEDGE IS POWER

Component 3

Out of the sketches we made we decided whose design was most efficient and began checking the viability of our design.

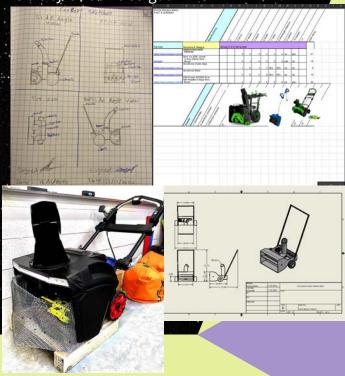

Our website: https://spark.adobe.com/page/n99ZjAEaiun8W/



Just because have to work in someplace new and unknown, doesn't mean you have to rely on something new and unknown - The lunar dust blower is built on comfort and familiarity, so you can complete tasks with ease!





About the Project

What is the Lunar Dust Blower?

The lunar dust blower is a device similar to that of a snow blowing machine - the only difference being that instead of removing snow from an unwanted area, it collects lunar dust and disperses it onto a lunar bubble dome.

Whats the idea behind the Lunar **Dust Blower?**

Space explorer's plan to one day, establish an inflatable dome on the moon. This dome will act as a sanctuary for astronauts to reside in during their stay.

Lunar Dust Properties:

Lunar dust, also known as regolith, contains helpful qualities, such as its ability to resist meteorite attractions and reduce radiation levels.





Prototype Visuals

Materials:

- Electric snow blower (Snow Joe sj625)
- Sheet metal
- Mounting Handle bar
- Steel mesh

Modifications:

- **Handle bar** allows versatility for thick astronautic glove usage
- **Filter** prevents rocks bigger than an inch from going through the chute and potentially impairing the dome
- **Lunar tires** allows for mobility on lunar terrain
- Machine Mouth Cover allows the blades of the machine to focus on collecting the dust that lies close to the surface

Extensions:

- Bendy Straw Tube extension to original machine chute, for attachment of crevice nozzle
- **Crevice Nozzle** extension to bendy straw tube, for creating linear and clean flow path for exertion of dust onto particular sections of lunar dome
- **Cattle Guard** covering of machine mouth opening - aids in collecting and shoveling piles of lunar dust toward machine blades

Preliminary Design



CAD Model



Prototype

